



**Future Technology Devices International Ltd.**

**Technical Note TN\_129**

**Driver Release Signing**

**Document Reference No.: FT\_000400**

**Version 1.0**

**Issue Date: 2011-31-01**

Microsoft x64 bit operating systems (vista and Windows 7) will not allow unsigned drivers to be installed by default. This technical note will discuss some possible workarounds to allow for driver testing and certification. Further information on this subject may be obtained from Microsoft.

Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use.

**Future Technology Devices International Limited (FTDI)**

Unit1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH United Kingdom

Tel.: +44 (0) 141 429 2777 Fax: + 44 (0) 141 429 2758

E-Mail (Support): [support1@ftdichip.com](mailto:support1@ftdichip.com) Web: <http://www.ftdichip.com>

Copyright © 2011 Future Technology Devices International Limited

---

## TABLE OF CONTENTS

<b>1</b>	<b>Introduction.....</b>	<b>2</b>
1.1	Required resources.....	2
<b>2</b>	<b>Disabling the OS Certification Check.....</b>	<b>3</b>
<b>3</b>	<b>External Certificates .....</b>	<b>4</b>
3.1	Trusted Certificates.....	4
3.2	Cross certificates .....	5
<b>4</b>	<b>Preparing the Driver .....</b>	<b>6</b>
4.1	Downloading.....	6
4.2	Creating the CAT file .....	6
4.3	Signing the CAT File .....	7
<b>5</b>	<b>Redistribution of the Driver File .....</b>	<b>8</b>
<b>6</b>	<b>Contact Information.....</b>	<b>9</b>
	<b>Appendix A – Terminology .....</b>	<b>12</b>
	<b>Appendix B – References.....</b>	<b>13</b>
	<b>Appendix C – Revision History.....</b>	<b>14</b>

---

## 1 Introduction

The drivers supplied by FTDI contain only our default settings but are certified to install on all variants of Windows OS. OEMs that choose to edit the driver may do so, but the WHQL certification will be invalidated.

Microsoft x64 bit operating systems (Vista and Windows 7) will not allow unsigned drivers to be installed by default. This technical note will discuss some possible workarounds to allow for driver testing including disabling the certification check in Windows and self certifying the driver.

Further information on this subject may be obtained from Microsoft.

For further advice on valid FTDI driver edits refer to:

[http://www.ftdichip.com/Support/Documents/AppNotes/AN\\_107\\_AdvancedDriverOptions\\_AN\\_000073.pdf](http://www.ftdichip.com/Support/Documents/AppNotes/AN_107_AdvancedDriverOptions_AN_000073.pdf)

An FTDI utility which helps users edit the driver is available from FTDI at:

[http://www.ftdichip.com/Support/Utilities/FT\\_INF.zip](http://www.ftdichip.com/Support/Utilities/FT_INF.zip)

### 1.1 Required resources

The following items are required to create the release signing of the edited FTDI driver.

1. PC running Windows OS
2. The FTDI driver – provided by FTDI for accessing the FTDI peripheral silicon from a Windows PC.
3. Verisign (or equivalent) certificate – Provided by Verisign and used by Microsoft to authenticate code
4. Microsoft Cross certificate – Provided by Microsoft and used to allow the release signing against your Verisign (or equivalent) certificate
5. Windows DDK or WDK – Development tools provided by Microsoft (free download)

## 2 Disabling the OS Certification Check.

If the F8 key on the keyboard of a PC is held down while the OS is booting up the menu window appears. The last item on this menu is to disable the driver certification check. Select this option before continuing Windows startup. This will allow non-certified drivers to be loaded.

Note: This feature needs to be repeated every time the PC is rebooted but it does allow for developers to test customised drivers.

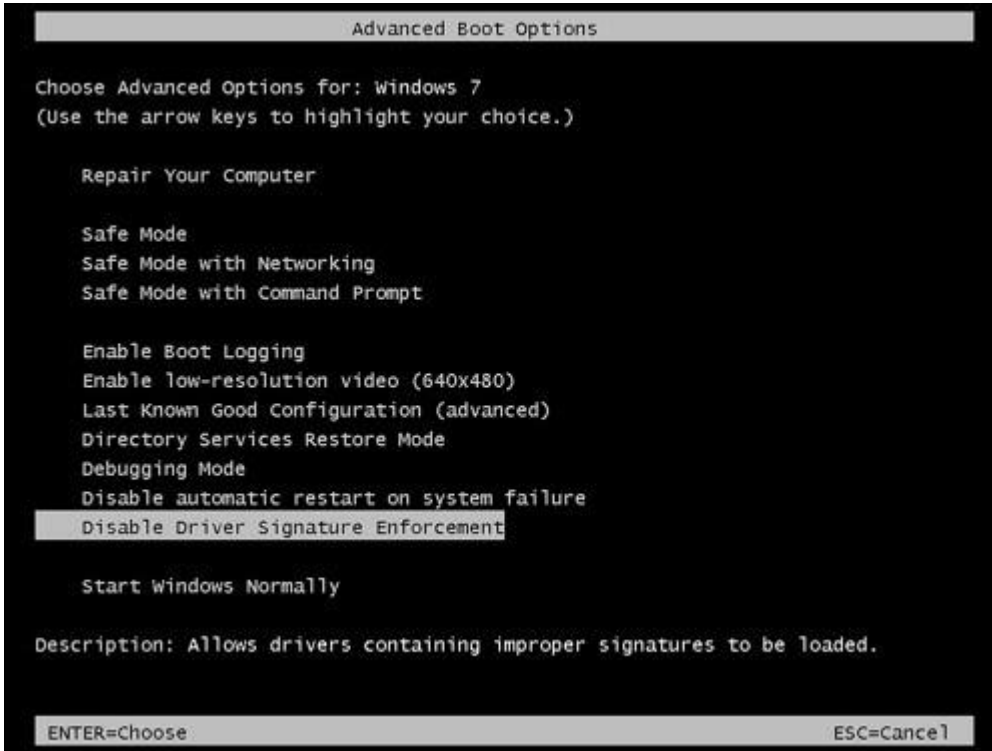


Figure 2.1: Windows 7 advanced Boot options

---

## 3 External Certificates

### 3.1 Trusted Certificates

FTDI use Verisign ([www.verisign.co.uk](http://www.verisign.co.uk)) as their trusted certificate source. This certificate is required when signing the driver. The certificate file provided from Verisign is a \*.pfx file which is a combination of a public certificate key (\*.spc) and a private certificate key (\*.pvk). Any fees charged for this certificate are charged and payable to Verisign.

When you receive your certificate it should be copied into your personal certificate store on the machine the modified driver package is generated on.

There are other providers that Microsoft accept as trusted sources. These are listed on their website at: <http://www.microsoft.com/whdc/driver/install/drvsign/crosscert.mspx>

Note: You can view what certificates available on a particular PC with START-> RUN -> Certmgr.msc

### 3.2 Cross certificates

A Microsoft cross certificate is available for free from their website. This is a \*.cer file and must correspond to the issuer of the code-signing certificate being used. This will provide the link between the trusted certificate you own and Microsoft. In our setup we use the Microsoft/Verisign cross certificate.

<http://download.microsoft.com/download/d/7/f/d7fea3df-4e87-4f8e-b748-212334653028/MSCV-VSClass3.exe>

When you receive your certificate it should be copied into your personal certificate store on the machine the modified driver package is generated on.

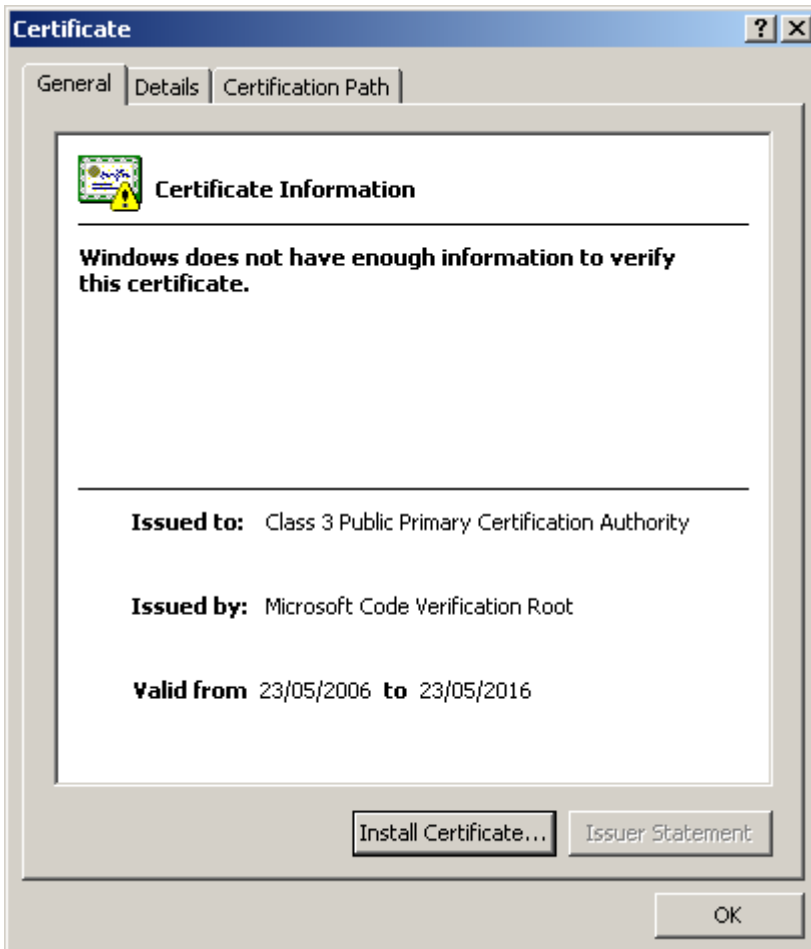


Figure 3.1: Cross certificate installation.

Simply select the Install certificate button and accept the defaults in the next popup window.

## 4 Preparing the Driver

### 4.1 Downloading

The FTDI driver may be downloaded from the FTDI website in a zip file.  
<http://www.ftdichip.com/Drivers/VCP.htm>

This file should be downloaded and unzipped before starting the signing process.  
 Free tools such as WinZip or WinRAR may be used to unzip the package.  
 The driver package provided uses a common inf file with separate x86 and x64 .sys files.

The inf files are in the top level folder. The x86 specific files are in the i386 folder and the x64 specific files are in the AMD64 folder.

The driver is effectively in 2 halves. The bus layer (FTDIBUS.inf and FTDIBUS.sys) must always be used. The Virtual Com Port Layer (VCP – ftdiport.inf and ftser2k.sys) is an optional filter layer that does not have to be installed, but must be present in the driver package for a reseller submission.

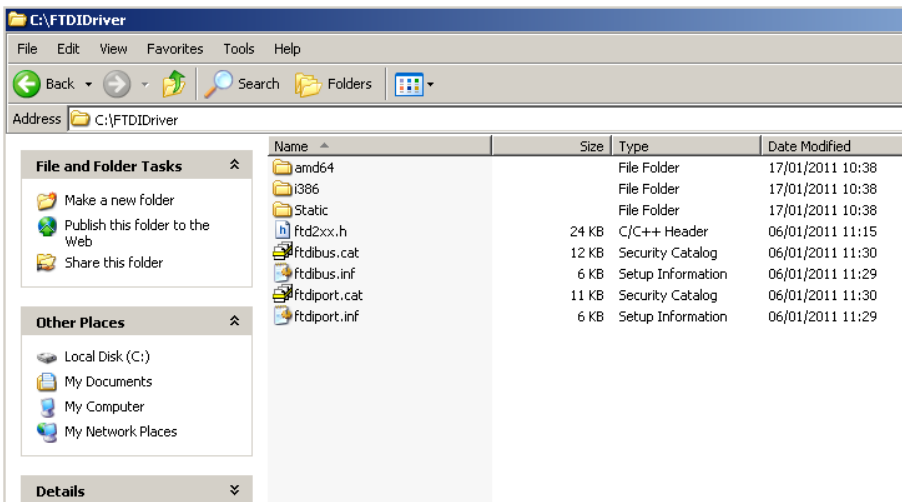


Figure 4.1: Driver Directory Structure.

Note: The folder used in this example and further paragraphs is C:\FTDIDriver. The OEM may use any folder name they prefer.

### 4.2 Creating the CAT file

CAT files are catalogue files that contain the information about the driver package. These need to be generated from the inf files to allow the signing to be done.

Windows WDK (or DDK) must be installed and running on the PC. This is a free download from the Microsoft Download Centre.

Open the WDK command prompt (Start -> Windows Driver Kits -> (WDK version) -> (build environment)) and send the command:

```
Inf2cat /driver: C:\FTDIDriver /os:vistax64,7_x64
```

This will use the driver inf files in the FTDIDriver folder to create two CAT files (ftdibus.cat and ftdiport.cat) with the inf2cat.exe that is part of the DDK. The CAT files specify VISTA and Windows 7 x64 OS.

These CAT files replace the existing ones supplied with the download.

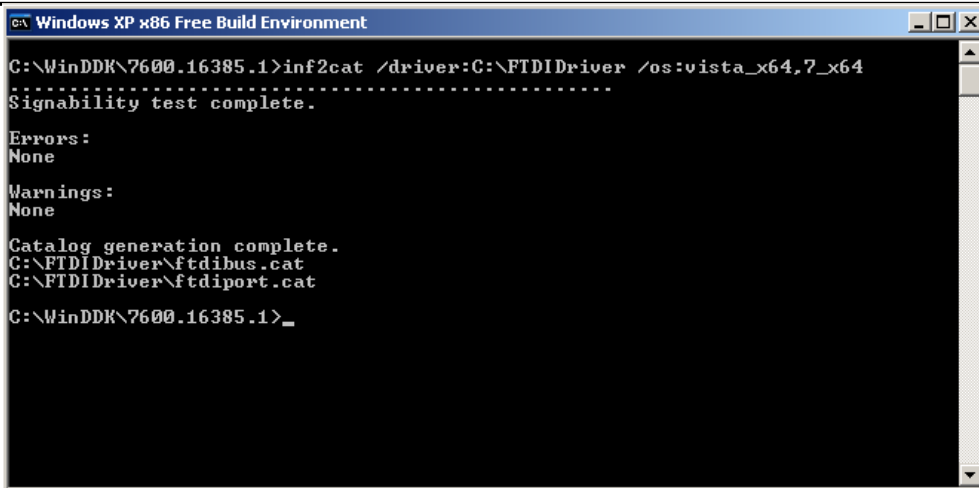
A screenshot of a Windows XP x86 Free Build Environment command prompt window. The window title is "c:\ Windows XP x86 Free Build Environment". The command prompt shows the execution of the command `inf2cat /driver:C:\FTDIDriver /os:vista_x64,7_x64`. The output indicates that the signability test is complete, with no errors or warnings. It also shows the successful generation of two catalog files: `C:\FTDIDriver\ftdibus.cat` and `C:\FTDIDriver\ftdiport.cat`. The prompt ends with `C:\WinDDK\7600.16385.1>`.

Figure 4.2: Creating CAT file.

### 4.3 Signing the CAT File

Signing the CAT files will allow for installation on the 64 bit versions of VISTA and Windows 7.

You must sign both the `ftdibus.cat` and the `ftdiport.cat` files.

```
Signtool sign /v /ac "C:\MSCV-VSClass3.cer" /a /s MY /n "Future Technology Devices International Ltd" /t  
http://timestamp.verisign.com/scripts/timestamp.dll C:\FTDIDriver\ftdibus.cat
```

```
Signtool sign /v /ac "C:\MSCV-VSClass3.cer" /a /s MY /n "Future Technology Devices International Ltd" /t  
http://timestamp.verisign.com/scripts/timestamp.dll C:\FTDIDriver\ftdiport.cat
```

#### Notes:

"C:\MSCV-VSClass3.cer" is the location that the Microsoft cross certificate was stored at.

"Future Technology Devices International Ltd" is the Certificate Number (CN Value) for our Verisign certificate.

Your strings may be different.



---

## 5 Redistribution of the Driver File

The edited and newly certified driver may be re-zipped up and redistributed provided it is for use with FTDI silicon.

Creating installers and self extracting zip files is beyond the scope of this technical note and up to the OEM as to how they wish to redistribute the files.

However for further reading the OEM may wish to refer to:

<http://www.microsoft.com/whdc/driver/install/difxtools.mspx>

<http://msdn.microsoft.com/en-us/library/ff553615.aspx>

## 6 Contact Information

### Head Office – Glasgow, UK

Future Technology Devices International Limited  
Unit 1, 2 Seaward Place, Centurion Business Park  
Glasgow G41 1HH  
United Kingdom

Tel: +44 (0) 141 429 2777  
Fax: +44 (0) 141 429 2758

E-mail (Sales) [sales1@ftdichip.com](mailto:sales1@ftdichip.com)  
E-mail (Support) [support1@ftdichip.com](mailto:support1@ftdichip.com)  
E-mail (General Enquiries) [admin1@ftdichip.com](mailto:admin1@ftdichip.com)  
Web Site URL <http://www.ftdichip.com>  
Web Shop URL <http://www.ftdichip.com>

### Branch Office – Taipei, Taiwan

Future Technology Devices International Limited (Taiwan)  
2F, No 516, Sec. 1 NeiHu Road  
Taipei 114  
Taiwan, R.O.C.  
Tel: +886 (0) 2 8797 1330  
Fax: +886 (0) 2 8751 9737

E-mail (Sales) [tw.sales1@ftdichip.com](mailto:tw.sales1@ftdichip.com)  
E-mail (Support) [tw.support1@ftdichip.com](mailto:tw.support1@ftdichip.com)  
E-mail (General Enquiries) [tw.admin1@ftdichip.com](mailto:tw.admin1@ftdichip.com)  
Web Site URL <http://www.ftdichip.com>

### Branch Office – Hillsboro, Oregon, USA

Future Technology Devices International Limited (USA)  
7235 NW Evergreen Parkway, Suite 600  
Hillsboro, OR 97123-5803  
USA  
Tel: +1 (503) 547 0988  
Fax: +1 (503) 547 0987

E-Mail (Sales) [us.sales@ftdichip.com](mailto:us.sales@ftdichip.com)  
E-Mail (Support) [us.admin@ftdichip.com](mailto:us.admin@ftdichip.com)  
Web Site URL <http://www.ftdichip.com>

### Branch Office – Shanghai, China

Future Technology Devices International Limited (China)  
Room 408, 317 Xianxia Road,  
ChangNing District,  
ShangHai, China

Tel: +86 (21) 62351596  
Fax: +86(21) 62351595

E-Mail (Sales): [cn.sales@ftdichip.com](mailto:cn.sales@ftdichip.com)  
E-Mail (Support): [cn.support@ftdichip.com](mailto:cn.support@ftdichip.com)  
E-Mail (General Enquiries): [cn.admin1@ftdichip.com](mailto:cn.admin1@ftdichip.com)  
Web Site URL: <http://www.ftdichip.com>

---

**Distributor and Sales Representatives**

Please visit the Sales Network page of the FTDI Web site for the contact details of our distributor(s) and sales representative(s) in your country.

**Legal Disclaimer:**

*System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH, United Kingdom. Scotland Registered Company Number: SC136640*

---

**List of Figures**

<b>Figure 2.1: Windows 7 advanced Boot options.....</b>	<b>3</b>
<b>Figure 3.1: Cross certificate installation. ....</b>	<b>5</b>
<b>Figure 4.1: Driver Directory Structure. ....</b>	<b>6</b>
<b>Figure 4.2: Creating CAT file. ....</b>	<b>7</b>

---

## Appendix A – Terminology

CAT	Catalogue File
DDK	Driver Development Kit
FTDI	Future Technology Devices International
OEM	Own Equipment Manufacturer
USB	Universal Serial Bus
VCP	Virtual Com Port
WDK	Windows Development Kit
WHQL	Windows Hardware Quality Labs

---

## Appendix B – References

Microsoft Instructions:

[http://www.microsoft.com/whdc/driver/tips/ifs\\_signing.msp](http://www.microsoft.com/whdc/driver/tips/ifs_signing.msp)

Microsoft Cross certificate:

<http://www.microsoft.com/whdc/winlogo/drvsign/crosscert.msp>

FTDI Drivers:

<http://www.ftdichip.com/Drivers/VCP.htm>

FTDI Advanced Driver Options:

[http://www.ftdichip.com/Support/Documents/AppNotes/AN\\_107\\_AdvancedDriverOptions\\_AN\\_000073.pdf](http://www.ftdichip.com/Support/Documents/AppNotes/AN_107_AdvancedDriverOptions_AN_000073.pdf)

FTDI INF Generator:

[http://www.ftdichip.com/Support/Utilities/FT\\_INF.zip](http://www.ftdichip.com/Support/Utilities/FT_INF.zip)

AN\_101 Using Microsoft's WHQL Process for Certifying Customer Modified FTDI Driver Files

[http://www.ftdichip.com/Support/Documents/AppNotes/AN\\_101\\_WHQL\\_Certified\\_Driver\\_Process.pdf](http://www.ftdichip.com/Support/Documents/AppNotes/AN_101_WHQL_Certified_Driver_Process.pdf)

TN\_128 Preparing an FTDI Based Periphera for USB-IF Certification

[http://www.ftdichip.com/Support/Documents/TechnicalNotes/TN\\_128\\_Preparing\\_for\\_USB-IF\\_Certification.pdf](http://www.ftdichip.com/Support/Documents/TechnicalNotes/TN_128_Preparing_for_USB-IF_Certification.pdf)

---

## Appendix C – Revision History

**Version 1.0** First release

31/01/2011